

PKS-PRO-E-10 - Servo System

FEATURES

- **Input Voltage Range of 170-253 VAC**
- **Rated Torque of 450 oz-in**
- **1.0 kWatt Power Rating**
- **2,500 PPR Incremental Encoder**
- **Fully Enclosed and Self-Cooled**
- **Oil Seal and Optional Brake**
- **High Overload Capacity**
- **MODBUS and CANopen Standard**
- **RS485 Interface**
- **Real Time Monitoring and Management**
- **Position, Speed, and Torque Control**




DESCRIPTION

The PKS-PRO-E-10 servo system includes a 1.0 kWatt EMJ AC Servo Motor operated by the PRONET drive. These packages are ideal for quick and easy start-ups, convenience and performance! The servo motor included in this package provides torque from 450 oz-in. The PRONET drives offer current forward-feedback control, acceleration forward-feedback control, speed viewer, and inertia viewer; providing for improved response performance. These drives operate standard with MODBUS and CANopen protocol. Each system includes a 5M power cable, 5M encoder cable, and a 3M communication cable.

System Specs	Rated Speed (RPM)	Rated Torque (oz-in)	Rated Current (A rms)	Inertia (oz-in-sec ²)	Torque Constant KT (oz-in/A)	Resistance (ohms)	Inductance (mH)	Driver Digital Display	Brake (24VDC)	Motor Length (mm)	Shaft Diameter (mm)
PKS-PRO-E-10-A-JP22	3000	450	5.3	0.0246	86.8	1.6	11.9	Yes	No	211	19
PKS-PRO-E-10-A-JP24	3000	450	5.3	0.0265	86.8	1.6	11.9	Yes	Yes	254	19

ORDERING INFORMATION

PKS-PRO - E - 10 - A - J P 2 2

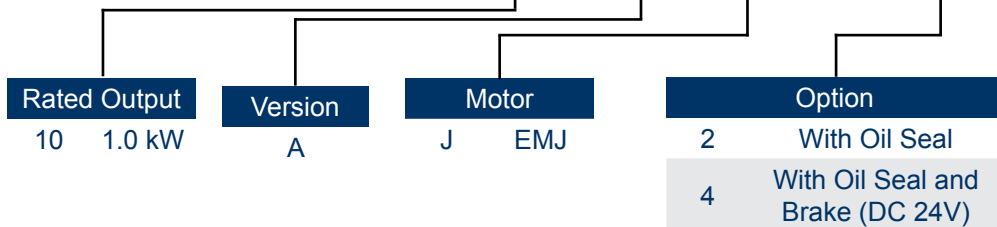

L011621

EMJ-10 Motor Specifications



FEATURES


- **Rated Torque of 450 oz-in**
- **3-Phase, 200VAC**
- **Peak Torque up to 300% of Rated Torque**
- **Peak Current up to 300% of Rated Current**
- **Speed of up to 4,500 RPM**
- **2,500 PPR Incremental Encoder Attached**
- **Power Ratings up to 1.0 kWatts**
- **Optional Brake and Oil Seal**
- **Long Life and Highly Reliable**
- **Neodymium-Iron-Boron Magnets (NdFeB)**
- **CE Certified**



SPECS

Model #	Rated Torque (oz-in)	Rated Power (Watts)	Rated Speed (rpm)	Rated Current (A rms)	Brake (24VDC)	Inertia (oz-in-sec ²)	Electric Time Constant T _E (ms)	Back EMF Voltage K _E (V/krpm)	Torque Constant K _T (oz-in/A)	Resistance (ohms)	Weight (lbs)
EMJ-10APB22	450	1000	3000	5.3	No	0.0246	9.9	38.4	86.8	1.6	9.93
EMJ-10APB24	450	1000	3000	5.3	Yes	0.0265	9.9	38.4	86.8	1.6	9.93

DIMENSIONS

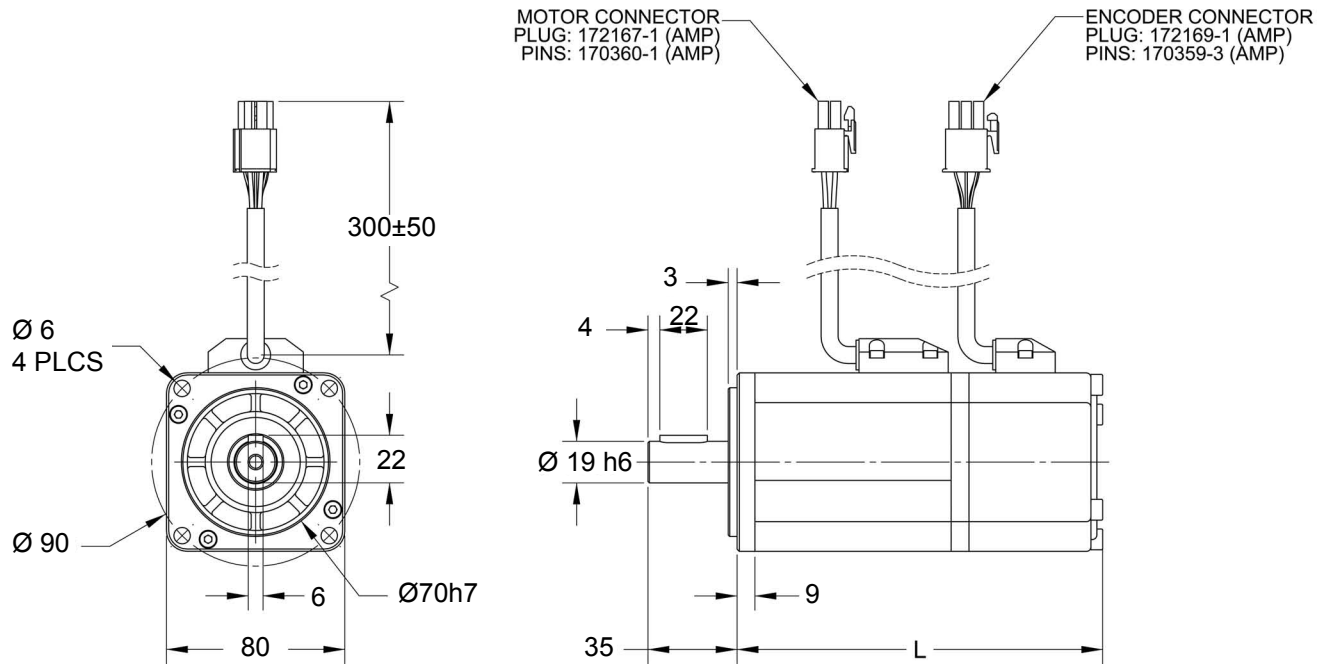

Model #	L
EMJ-10APB22	156
EMJ-10APB24	199

Note: All Dimensions in millimeters (mm)

Note: Part Number EMJ-10APB24 is with the brake option. The length of 'L' includes the motor body length + the length of the brake.




PRO-E-10 Driver Specifications

FEATURES

- Input Voltage Range of 170-253 VAC
- Rated Power up to 1.0 kWatts
- Improved Responsiveness Performance
- Enhanced Position Precision
- Low Speed Stability
- Enables Less Debugging
- MODBUS and CANopen Standard
- RS485 Interface
- Position, Speed, and Torque Control
- Homing Function




ProNet DIMENSIONS

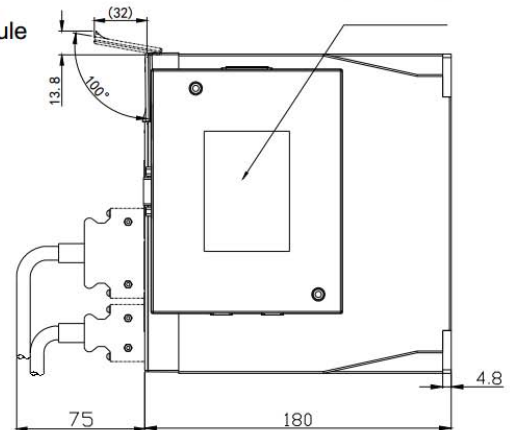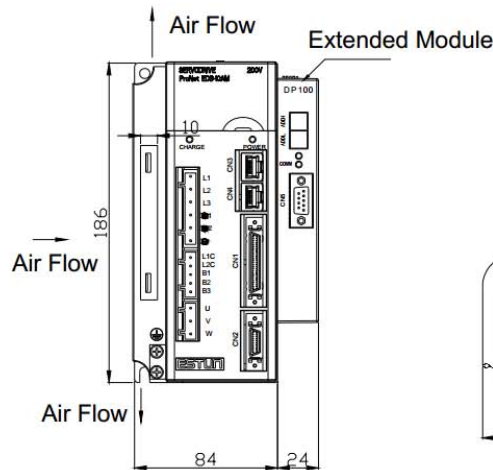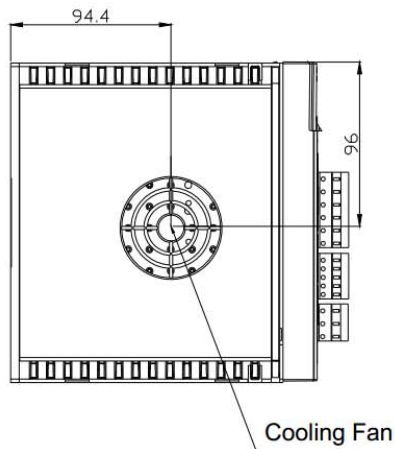


Dimensions are in mm

TORQUE CURVE

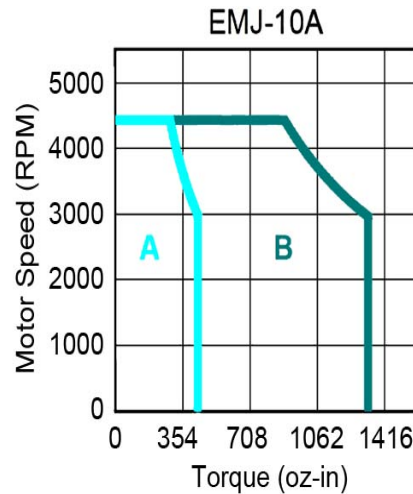


A - Continuous Working Area

B - Repeatedly Working Area

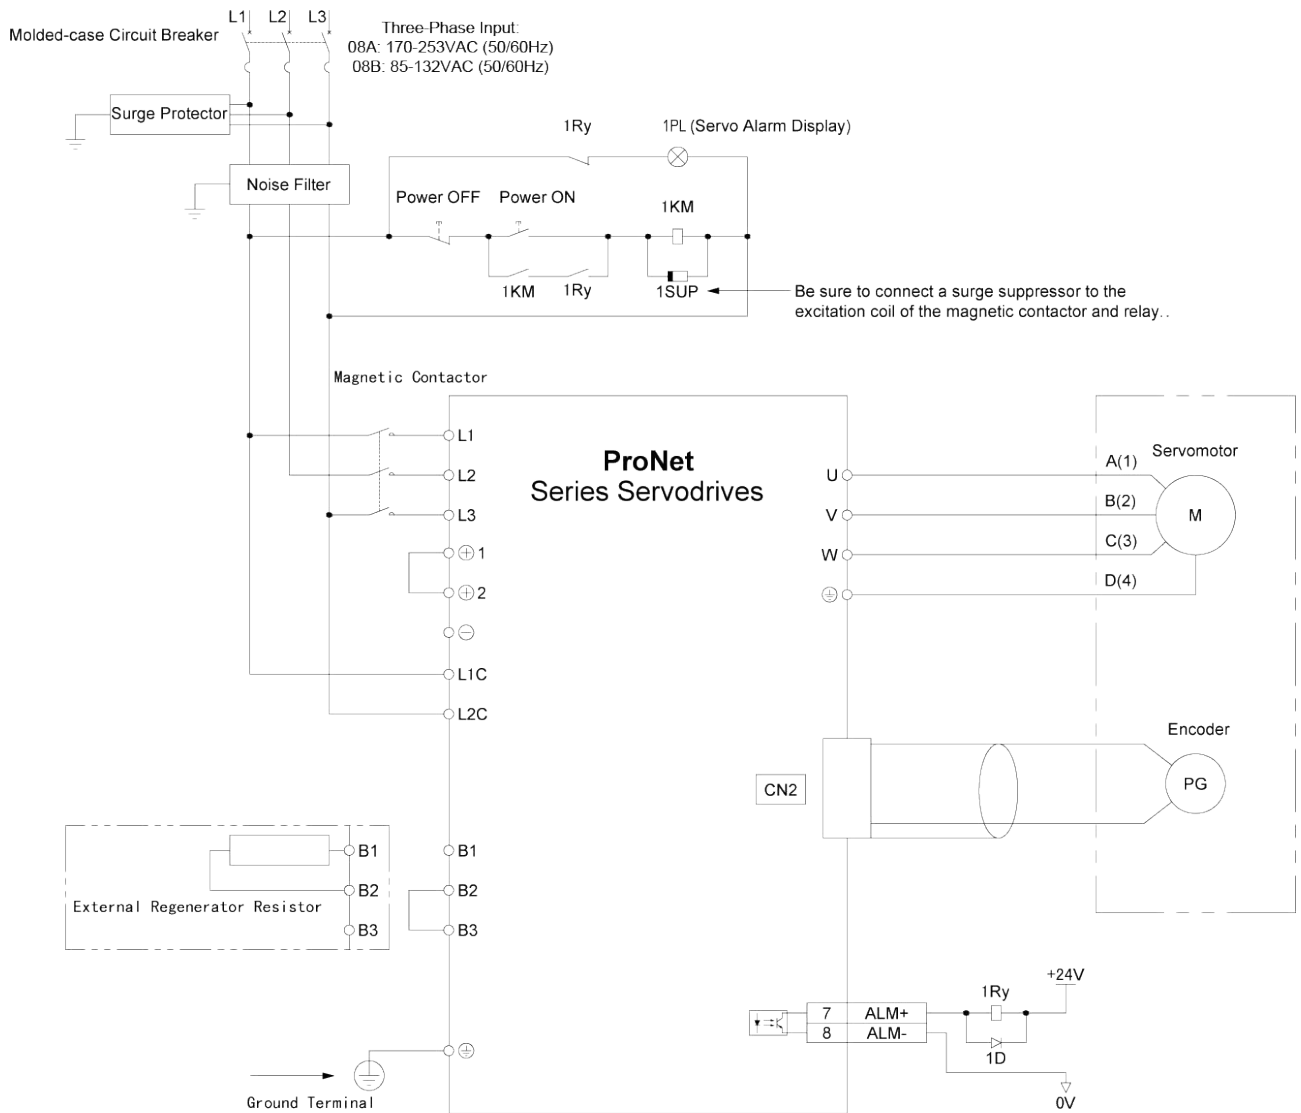

Note: The Surge Protector, Noise Filter, Magnetic Contactor, and the Regenerative Resistor are Optional.

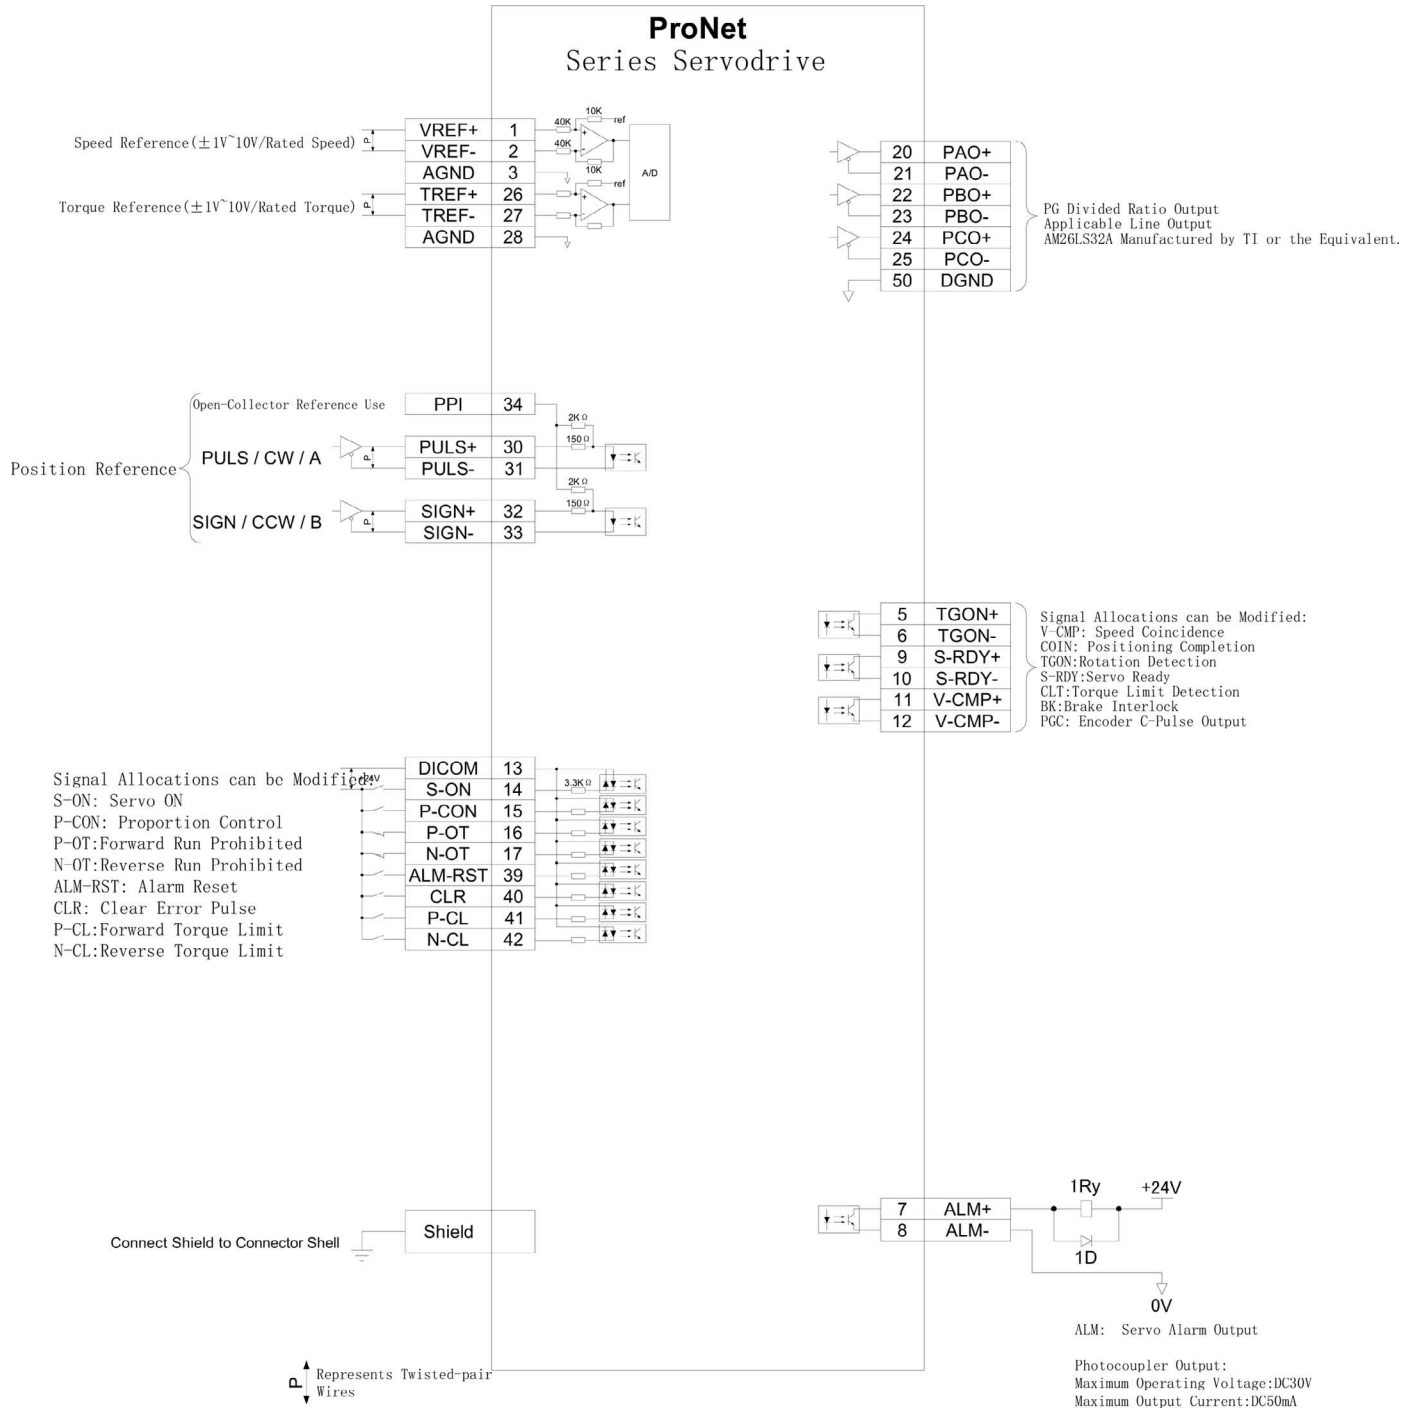

Compatible Drivers

Part Number	Description
PRONET-E-10A	Servo Driver



Compatible Motors

Part Number	Description
EMJ-10APB22	Servo Motor
EMJ-10APB24	Servo Motor



Compatible Cables

Part Number	Description
PDM-JB18-05	Power Cable
BMP-JB24-05	Encoder Cable
PRONET-PSC-CC24-02	Comm. Cable

