

# KNC-HMI-GT100E Touch Screen



## FEATURES

- **Industrial CPU, Main Frequency 800MHz**
- **10.1" HD Display**
- **16.77M True Colors**
- **Support Ethernet, Built-In 4G / Wifi**
- **Powerful Script Function, Support Edge Computing**
- **Built in Internet of Things (IoT), Support Remote Services**




## DESCRIPTION

The GT100E series HMI is a 10.1" High Definition touch screen. This HMI Series is supported by Ethernet and by either the built in Wifi or 4G Network. This efficient and convenient HMI is designed with three different download methods of Ethernet Port, USB Slave (Micro USB), and USB Host (thumb drive). The GT100E has built in Internet of Things (IoT) functions that provide remote service support from an app or website. The remote services it supports are HMI Function upload/download, transmission PLC program upload/download, transmission online debugging PLC program, and desktop monitoring.

## DIMENSIONS

### KNC-HMI-GT100E-4G & KNC-HMI-GT100E-WIFI

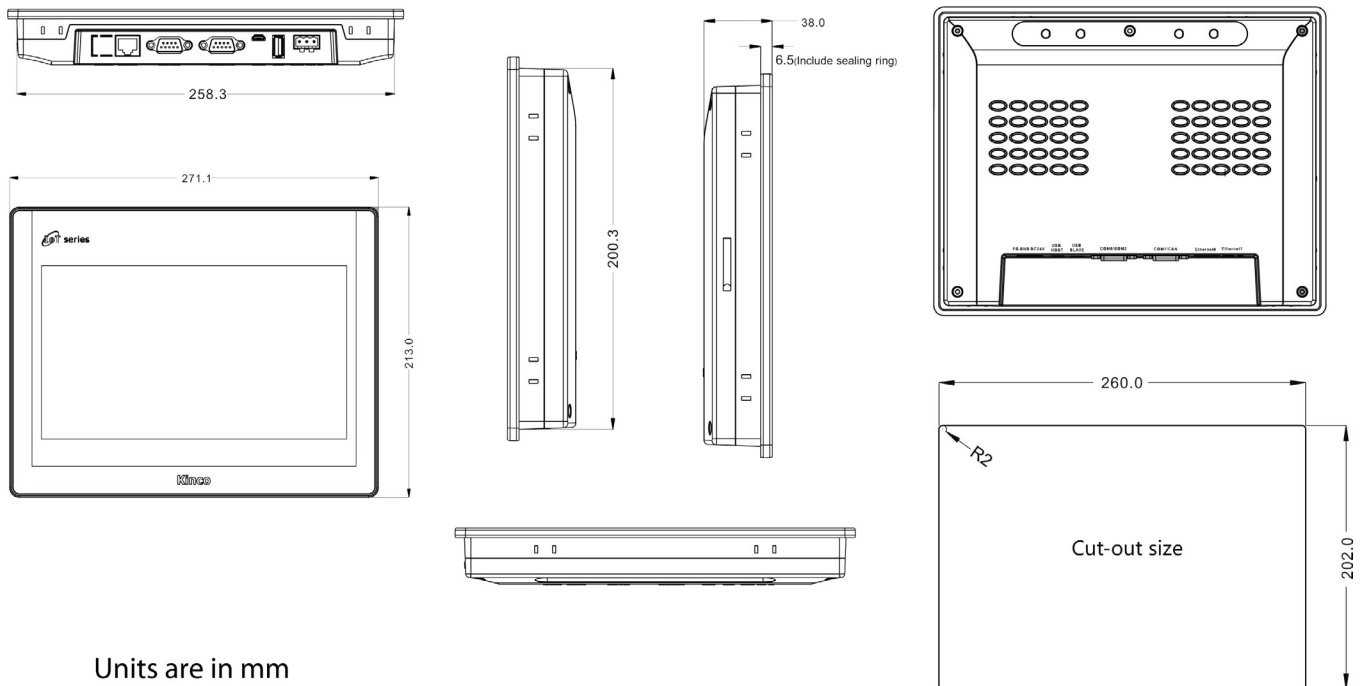

L012013

# KNC-HMI-GT100E Touch Screen



SPECIFICATIONS

MODEL	GT100E-4G	GT100E-WIFI
<b>Performance Specification</b>		
Display	10.1" TFT	
Display Area	222.72 (W) x 125.28 (H) (mm)	
Resolution	1024x600 pixels	
Display Color	16.7 Million Color	
Display Angle of View	85/85/85/85(left/right/up/down)	
Contrast Ratio	800:1	
Backlight	LED	
Brightness	350cd/m2	
Backlight Life	More than 30000 Hours	
Touch Panel	4 Line Precision Resistance Network (Surface Hardness 4H)	
CPU	ARM RISC 32Bit 800MHz	
Storage	256MB NAND Flash Memory + 128MB DDR3 Memory	
RTC	Built-in	
Expandable Memory	1 USB Host	
Print Port	USB Host/Serial Port	
Network Access	Ethernet, 2G / 3G / 4G Wireless Communication	Ethernet, Wi-Fi
Program Download	USB Slave (Micro USB) / USB / Ethernet	
Wi-Fi / WLAN	LTE-FDD Band 1/3/5/8 LTE-TDD Band 38/39/40/41 TD-SCDMA Band 34/39 UMTS BC0, EVDO Bc0 CDMA1xBc0, GSM Band 3/5/8	IEEE802.11 b/g/n 802.11b:max 17dBm 802.11g:max 17dBm 802.11n:max 17dBm
VPN	Support HMI Remote Upload, Download and Screen Monitoring, Support PLC Transparent Transmission Program Upload, Download and Monitoring.	
Ethernet	One 10/100MHz Adaptive Port	
Communication Port	COM0:RS232/RS485/RS422; COM2:RS232	
<b>Electrical Specification</b>		
Input Power Supply	DC10.8V ~ DC28V	
Rated Power	6W @DC24V	
Allowable Loss of Power	<3ms	
Insulation Resistance	Over 50MΩ@500VDC	
Hi-pot Test	500 VAC 1 Minute	
<b>Structure Specification</b>		
Shell Material	Engineering Plastic	
Shape Size	271.1 x 213 x 38 (mm)	
Cutout Size	260 x 202 (mm)	
Weight	2.42 lbs	
<b>Environment Specification</b>		
Working Temperature	-10 ~ 50°C	
Working Humidity	10 ~ 90%RH (non-condensing)	
Storage Temperature	-20 ~ 60°C	
Storage Humidity	10 ~ 90%RH (non-condensing)	
Vibration Test	10 ~ 500Hz, 30m/s <sup>2</sup> , (X, Y, Z direction/hour)	
Cooling Mode	Natural Air Cooling	

L012013

# KNC-HMI-GT100E Touch Screen



## SPECIFICATIONS

MODEL	GT100E-4G	GT100E-WIFI
Performance Specification		
Certification		
Panel Protection Grade	Conforming to IP65 Certification(4208-93)	
CE Certification	EN61000-6-4:2007+A1:2011, EN61000-6-2:2005	
Software		
Configuration Software	Kinco DTools V4.1 and Above	

L012013