KNC-SRV-SMK60D-0060 Servo Motor

FEATURES

- ***24-60VDC***
- ***600W Power Rating***
- ***Rated Torque of 270 oz-in***
- ***Maximum Speed of 3500 RPM***
- ***16/17 Bit Multi-Turn Magnetic Encoder***
- ***IP54 Protection Level***
- ***Insulation Class F***
- ***Brake Option Available***

DESCRIPTION

The SMK60D-0060 Series Servo Motor offers a low-cost solution for motion control applications requiring position and speed control. With the 16/17 Bit Single-Turn Magnetic Encoder, it allows for better cushioning ability and higher cost-performance ratio. These Servo Motors have Insulation Class F which is the best Insulation Class on the market. They are very quiet with high reliability and stability in high temperature environments. These Servo Motors boast peak torque values up to 811 oz-in, provide excellent dynamic response, allow for 3 times the overload capacity, and has a rated torque of 270 oz-in. It is available in a 60mm square flange size, with a brake option.

ORDERING INFORMATION

SMK60D - 0060 - 30QAK - 5DCU

Flange Size (mm)	Inertia Type	Rated Power (Watts)	Rated Speed (rpm)	Encoder	Brake	Shaft Options	Voltage	Poles	Connector
60	D Medium Inertia	600	3000	Q 16/17 Bit Multi-Turn Magnetic	A No Brake B Brake	K Keyed Shaft	D DC48V	5 Pole Pairs	U Communication Encoder Socket

L012081


4985 E. Landon Dr. Anaheim, CA 92807 **Tel. (714) 992-6990** Fax. (714) 992-0471 **www.anaheimautomation.com**

SPECIFICATIONS


Model	KNC-SRV-SMK60D-0060-30QAK-5DCU KNC-SRV-SMK60D-0060-30QBK-5DCU
Compatible Driver	KNC-SRV-FD135S-AS-000 KNC-SRV-FD135S-ES-000
DC Link Voltage (VDC)	48
Rated Power (W)	600
Rated Torque (oz-in)	270
Rated Speed (RPM)	3000
Max Speed (RPM)	3500
Rated Current (A)	15
Maximum Torque (oz-in)	811
Maximum Current (A)	48
Rated Standstill Torque (oz-in)	297
Rated Standstill Current (A)	16.5
Resistance Line-Line (Ω)	0.15
Inductance Line-Line (mH)	0.3
Electrical Time Constant (ms)	2
Mechanical Time Constant (ms)	0.93 (0.96 with brake)
Torque Constant Kt (oz-in/A)	20
Rotor Moment of Inertia Jm (oz-in-s^2)	0.01002 0.01035 (with brake)
Brake Holding Torque (oz-in)	283
Pole Pair Number	5
Insulation Class	F
Maximum Radial Force F (N)	115
Maximum Axial Force F (N)	70
Weight (lbs)	3.08 3.75 (with brake)
Length of Motor (mm)	95.5 ± 0.5 131 ± 0.5 (with brake)

DIMENSIONS

KNC-SRV-SMK60D-0060-30QAK-5DCU

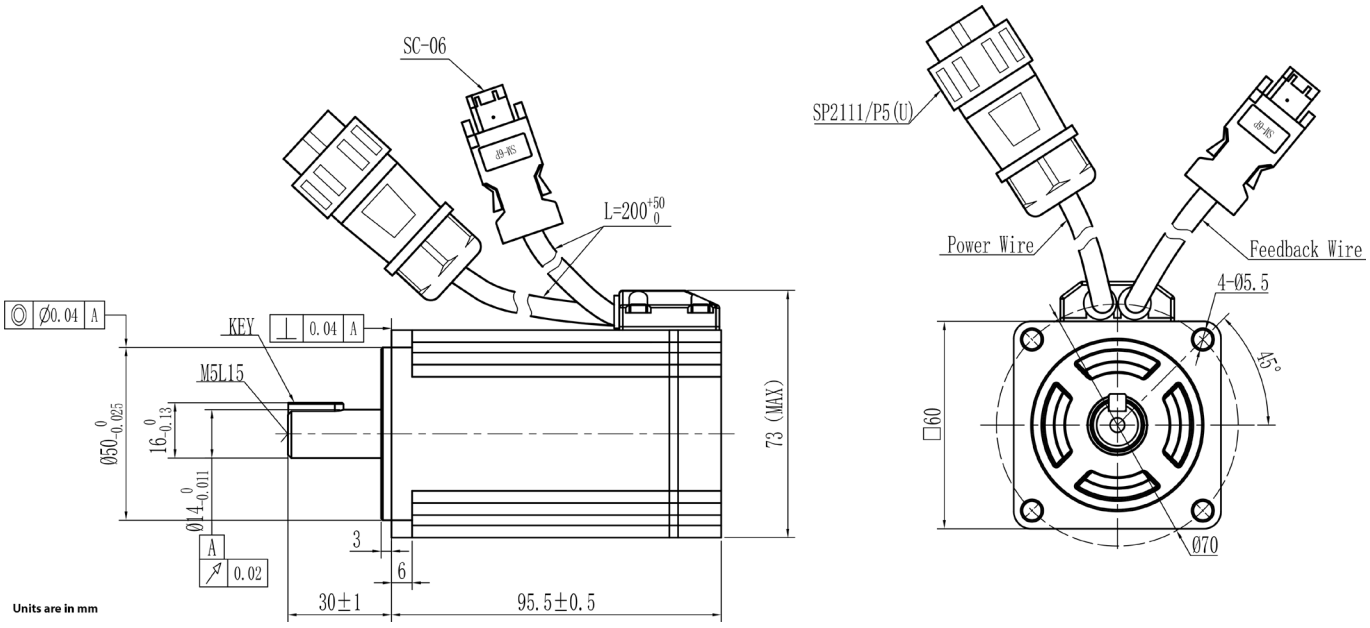


KNC-SRV-SMK60D-0060-30QBK-5DCU

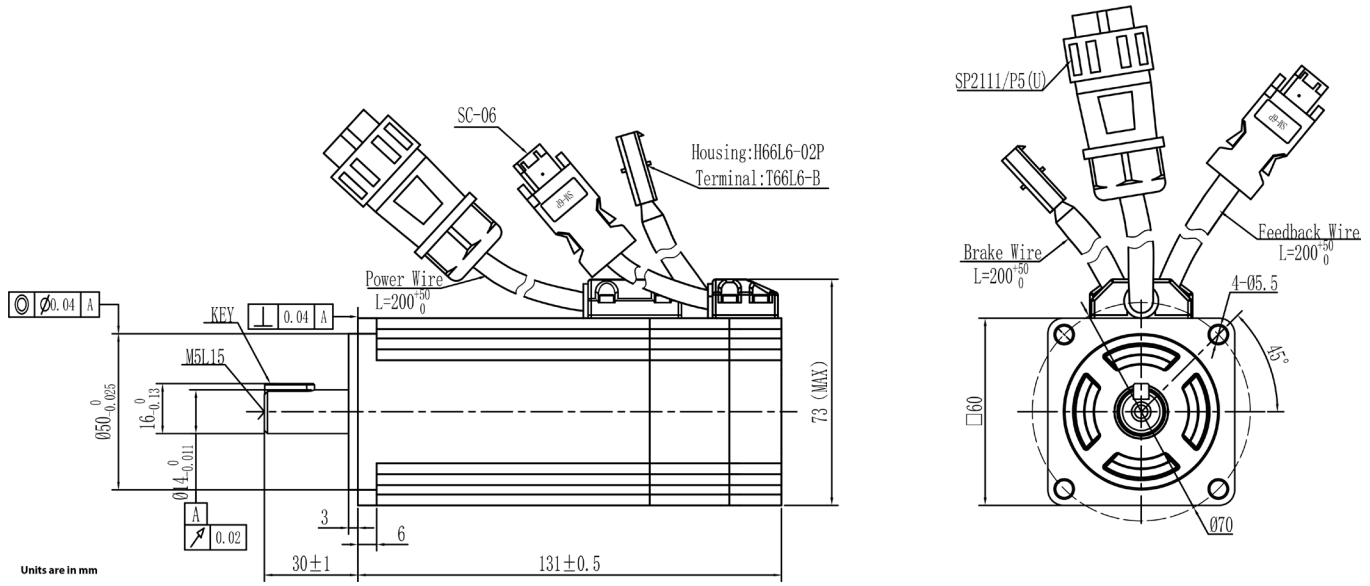


TORQUE CURVE

KNC-SRV-SMK60D-0060-30QAK-5DCU & KNC-SRV-SMK60D-0060-30QBK-5DCU

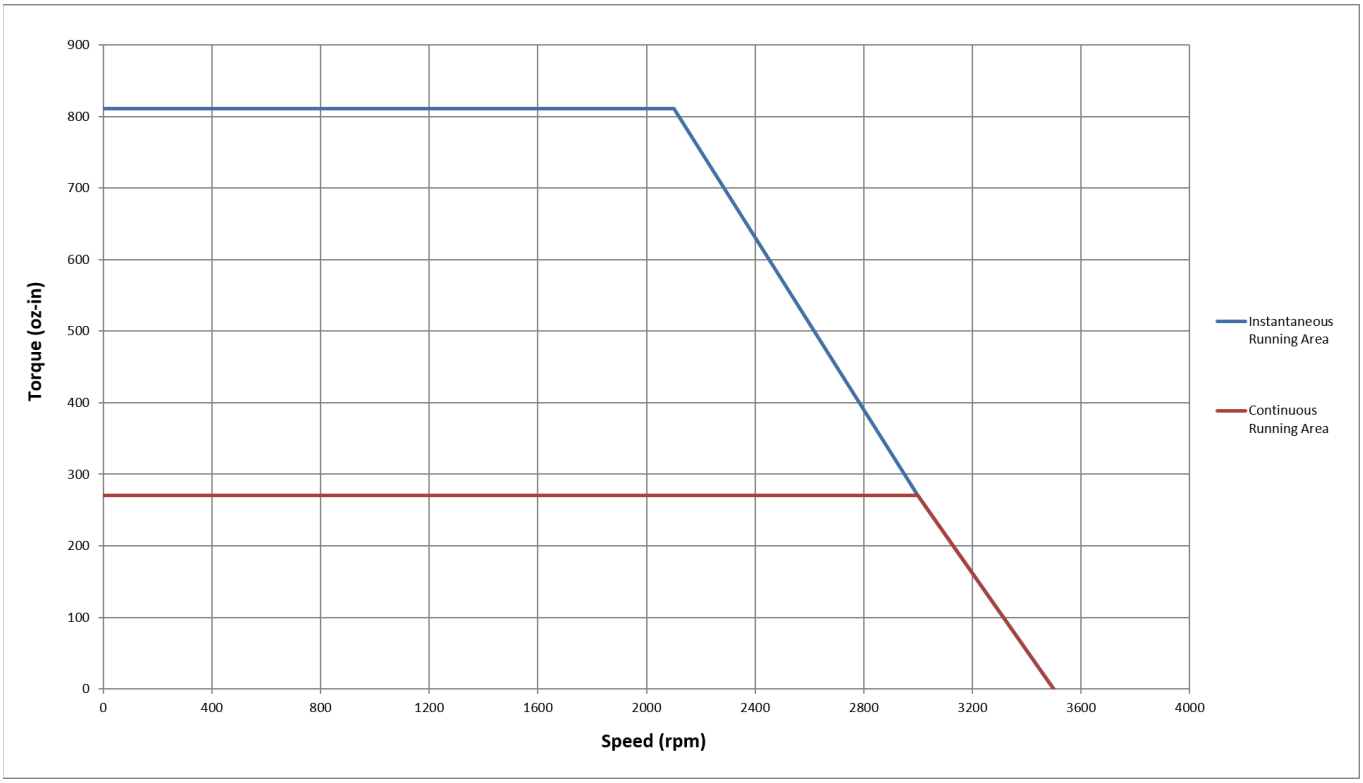


WIRING PINOUTS

Motor Cable: KNC-SRV-M-Y-20A-SP-LL-S for KNC-SRV-SMK60D-0060-30QAK-5DCU & KNC-SRV-SMK60D-0060-30QBK-5DCU

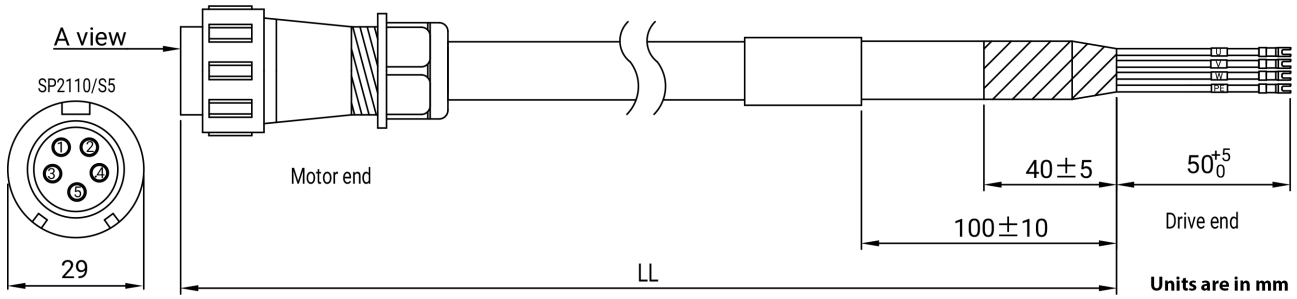


KNC-SRV-M-Y-20A-SP-LL-S		
Color	Signal	Motor End SP2110/S 5pole
White	U	PIN1
Black	W	PIN3
Red	V	PIN2
Yellow-Green	PE+Shielding	PIN4
NC	NC	PIN5

Brake Cable: KNC-SRV-BRA-LL-KL for KNC-SRV-SMK60D-0060-30QBK-5DCU

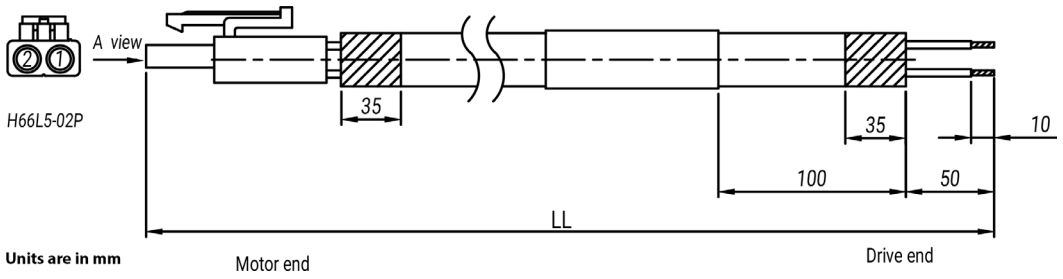

KNC-SRV-BRA-LL-KL		
Cable Color	Signal	PIN #
Red	BR +	PIN 1
Blue	BR -	PIN 2

Encoder Cable: KNC-SRV-E-H-MV-U-LL for KNC-SRV-SMK60D-0060-30QAK-5DCU & KNC-SRV-SMK60D-0060-30QBK-5DCU

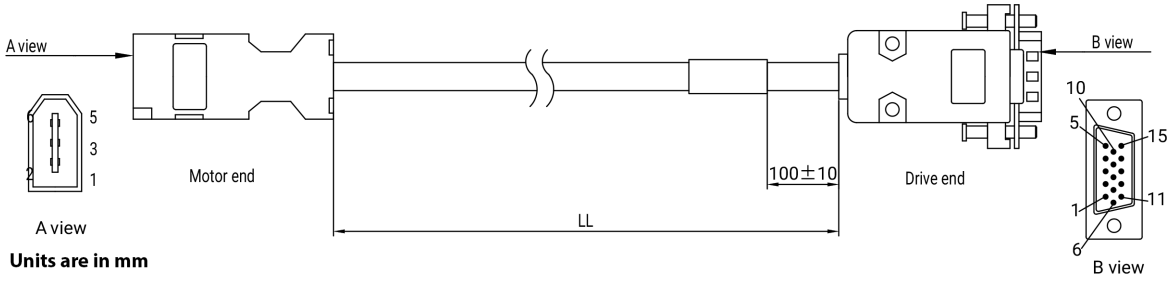

KNC-SRV-E-H-MV-U-LL			
Color	Signal	Motor Side SC-06 Female	Drive Side 15PIN DB Male
Red	VDD	PIN1	PIN1
Orange	GND	PIN2	PIN2
Brown	MA_P+	PIN3	PIN10
Black	MA_N-	PIN4	PIN15
Blue	SLO_P+	PIN5	PIN9
Purple	SLO_N-	PIN6	PIN14
Shielding Wire	Shield	Shell	Shell

SPECIFICATIONS

Model	Motor Cable	Encoder Cable	Brake Cable
KNC-SRV-SMK60D-0060-30QAK-5DCU	KNC-SRV-M-Y-20A-SP-LL-S	KNC-SRV-E-H-MV-U-LL	-
KNC-SRV-SMK60D-0060-30QBK-5DCU			KNC-SRV-BRA-LL-KL

Model		KNC-SRV-SMK60D-0060-30QAK-5DCU KNC-SRV-SMK60D-0060-30QBK-5DCU
Length of Motor L(mm)		95.5 ± 0.5 131 ± 0.5 (with brake)
Cooling Method		Totally Enclosed, Self-Cooling
Protection Level		IP54
Environmental Conditions of Operation	Temperature	-20˚C~+40˚C
	Humidity	Below 90% RH (No condensation)
	Ambient Environment	Keep away from corrosion, flammable gases, oil droplets and dust
	Altitude	Maximum Altitude 2000m, From 1000 to 2000m, the power decreases by 1.5% per 100m increase.