PSAM 125W Power Supply



- · Low Cost, High Reliability
- High Efficiency, Low Working Temperature
- Built-in active PFC function
- Built-in remote sense function
- 125W with 15CFM FAN
- 100% Full Load Burn-In Test
- Short Circuit/Over Voltage/Overload Protection
- Compact Size, Light Weight
- Power Supply Includes Cables With 24" flying leads




The PSAM 125W power supplies have a single voltage output with a built-in PFC function and remote sense function. With an adjustable output, these power supplies are efficient to run Anaheim Automation's lines of low current microsteppers and programmable controllers. With a compact size of 5" x 3" and dual mounting position "L Bracket", the PSAM 125W power supplies can be mounted just about anywhere.

	INPUT								
Ra	Itage inge AC)	Voltage Range (VDC)	Frequency Range	Power Factor	Efficiency	AC Current	Inrush Current (Cold Start)	Leakage Current	
90	~264	127~370	47~63 Hz	PF>0.93/230 VAC	84%	1.7A/115VAC .75A/230VAC	24A/230VAC	<2mA/240VAC	

OUTPUT											
Part Number	DC Voltage	Rated Current (A)	Current Range (A)	Rated Power (W)	Ripple & Noise	Volt- age Adj. Range (V)	Voltage Toler- ance	Line Regula- tion	Load Regula- tion	Setup, Rise Time	Hold Time
PSAM24V4.2A	24V	4.2	0~4.2	100.8	150mVp- p	22.8~26.2	±1.0%	±0.5%	±1.0%	2000ms, 30ms at full load	24ms at full load
PSAM48V2.1A	48V	2.1	0~2.1	100.8	250mVp-	45.6~50.4	±1.0%	±0.5%	±1.0%	2000ms, 30ms at full load	24ms at full load

L011040



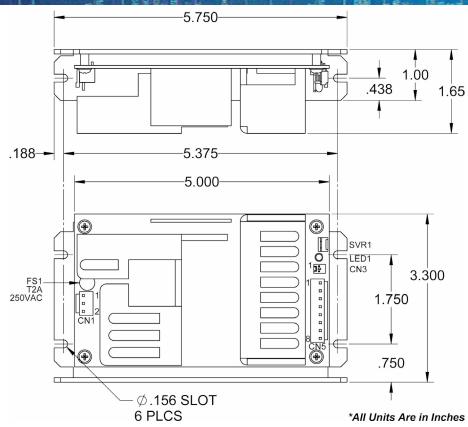

AC Input Connector (CN1): JST B3P-VH or Equivalent								
Pin No.	Assignment	Mating Housing	Terminal	Included Cable				
1	AC/L		JST SVH-21T- P1.1 or Equivalent	Black				
2	No Pin	JST VHR or Equivalent						
3	AC/N			White				

DC Output Connector (CN5): JST B8P-VH or Equivalent								
Pin No.	Assignment	Mating Housing Terminal		Included Cable				
1-4	-V	JST VHR or	JST SVH-21T- P1.1 or Equivalent	Black				
5-8	+V	Equivalent		Yellow				


AC Input Connector (CN3): MOLEX 5045-02 or Equivalent							
Pin No.	Assignment	Mating Housing	Terminal	Included Cable			
1	RS+	MOLEX 5051 or Equivalent	MOLEX 4809 or Equivalent				
2	RS-						


⚠ HS1, HS2 CAN NOT BE SHORTED

4985 E. Landon Drive Anaheim, CA 92807 Tel. (714) 992-6990 Fax. (714) 992-0471

www.anaheimautomation.com



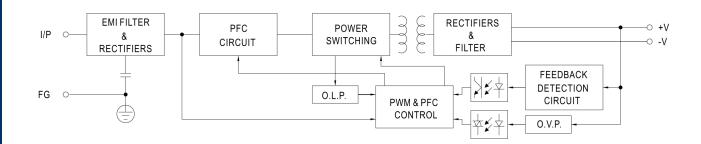

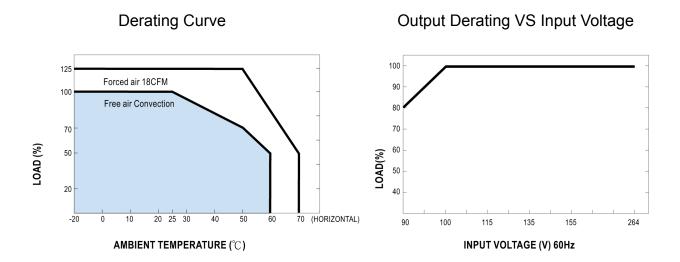

4985 E. Landon Drive Anaheim, CA 92807

Tel. (714) 992-6990

Fax. (714) 992-0471

www.anaheimautomation.com