BLWS23MDCUSB

## Programmable PI Controller

- 2-Quadrant Operation
- Hall Sensor Feedback
- 0-5VDC Analog Input Speed Control
- Short Circuit Protection
- Requires 24VDC
- Run/Stop Input
- TTL-CMOS Compatible Inputs
- Motor Frame: 2.3" Square (Similar to NEMA 23)




The BLWS23MDCUSB Series is a compact microcontroller-based Programmable Brushless DC Motor Controller with Hall Sensor feedback for accurate speed measurement. With the two parts combined into one casing, the need to wire up the motor has been eliminated. It provides flexible, independent control of a Brushless DC motor from computers, or any machine controller with a serial port. It is also capable of standalone operation, making it an embedded machine controller. The easy-to-use Windows software, BMC100, can be used to directly control the BLWS23MDCUSB for Real Time Motion through serial communication.


The BLWS23MDCUSB provides accurate control of motor speed, direction, coast and brake for a Brushless DC Motor. It is embedded with a Proportional-Integrator (PI) controller. Proportional and Integrator Constants, Kp and Ki, can be programmed using the BMC100 Windows Software or in direct mode. The controller has two modes through which it can control the speed of th motor: Analog Mode and Digital Mode. In Digital Mode, the user directly set the desired speed. The Analog Mode provides standalone functionality to the controller with a dynamic DC voltage input (0-5V) to control the speed of the motor.

## **Ideal Applications:**

Automated machinery or processes that involve food, cosmetic, or medical packaging, electronic assembly, robotics, factory automation, medical diagnostics, inspection and security devices, conveyor and material handling systems, pump flow control, or whereever speed control is required.




Model	L (in)
BLWS23MDCUSB1	2.97
BLWS23MDCUSB2	3.37
BLWS23MDCUSB3	4.15
BLWS23MDCUSB4	4.98
BLWS23MDCUSB5	5.73

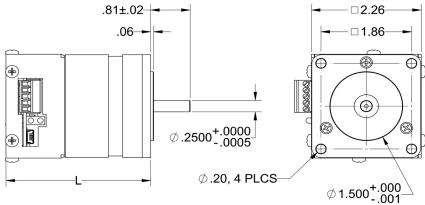


Dimensions are in inches


L011479



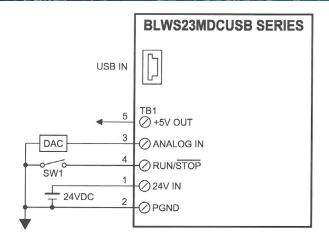

Desition	Description
Position	Description
1	Power 24VDC
2	Power Ground
3	Analog Speed Input
4	RUN/STOP Input
5	5VDC Output

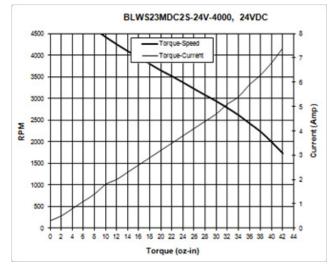

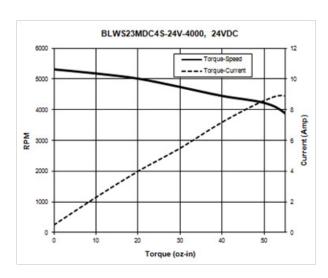

Model #	Motor Frame	Voltage (V)	Speed (RPM)	Speed (RPM)	Torque (oz-in)	Constant (oz-in/A)	Power (W)	Weight (lbs)	Length (inch)
BLWS23MDCUSB1S-24V-4000	2.3 in. Square	24	4000	5900	8	5	23	0.8	2.97
BLWS23MDCUSB2S-24V-4000	2.3 in. Square	24	4000	5100	16	5.5	46	1.3	3.37
BLWS23MDCUSB3S-24V-4000	2.3 in. Square	24	4000	5000	31	6	92	1.9	4.15
BLWS23MDCUSB4S-24V-4000	2.3 in. Square	24	4000	5200	45	5.5	134	2.4	4.98
BLWS23MDCUSB5S-24V-4000	2.3 in. Square	24	4000	5600	62	5.5	184	3.0	5.73
Winding Type:	Delta, 4 Poles		Max	Radial For	ce:	28N	@ 10mm	from Flang	je
Hall Effect Angle:	120 Degree Elect	rical Angle	Max	Axial Force	<b>e</b> :	10N	- Force		
Shaft Run Out:	0.025mm		Insu	lation Class	3:	Class	s B		
Radial Play:	0.02mm@450g		Diel	ectric Stren	gth:	500V	DC for or	ne minute	
End Play:	0.08mm@450g		Insu	lation Resis	stance:	100N	10hm, 500	OVDC	

Model #	Description
PSAM24V2.7A	DC Power Supply 24VDC at 2.7 Amps