C-08 - Servo System




- Input Voltage Range of of 187-242 VAC
- Rated Torque of 338 oz-in
- 750 Watt Power Rating
- No Load Speed up to 4,500 RPM
- 2,500 PPR Incremental Encoder
- Enclosed and Self-Cooled
- Oil Seal and Optional Brake
- RS232 and CAN Communication
- Real Time Monitoring and Management
- Position and Speed Control
- Optional Handheld Controller



The EDC-08 servo system includes a 750 Watt EMJ motor operated by the EDC drive. These packages are ideal for quick and easy start-ups, convenience and performance! The servo motors included in these packages provide up to 338 oz-in of rated torque. The EDC drives are designed to switch dynamically among the different control modes for convenient and flexible operation. These drives operate standard with RS232 communication and are a great fit for position control requirements. Each system includes a 5m power cable, 5m encoder cable, and a 3m communication cable.

| Item Number | Rated Speed (RPM) | Rated Torque (oz-in) | Rated Current (A rms) | Inertia (oz-in-sec²) | Torque Constant K _T (oz-in/A) | Resistance (ohms) | Inductance (mH) | Driver Digital Display | Brake (24VDC) | Motor Length (mm) | Shaft Diameter (mm) |
|-----------------|-------------------------|----------------------------|-----------------------------|-------------------------|---|----------------------|--------------------|------------------------------|------------------|-------------------------|---------------------------|
| EDC-08-A-JP22 | 3000 | 338 | 4.0 | 0.0191 | 86.8 | 2.0 | 16.5 | No | No | 138 | 19.00 |
| EDC-08-A-JP24 | 3000 | 338 | 4.0 | 0.0208 | 86.8 | 2.0 | 16.5 | No | Yes | 181 | 19.00 |
| EDC-08-A-JP22-C | 3000 | 338 | 4.0 | 0.0191 | 86.8 | 2.0 | 16.5 | Handheld Controller | No | 138 | 19.00 |
| EDC-08-A-JP24-C | 3000 | 338 | 4.0 | 0.0208 | 86.8 | 2.0 | 16.5 | HandHeld Controller | Yes | 181 | 19.00 |

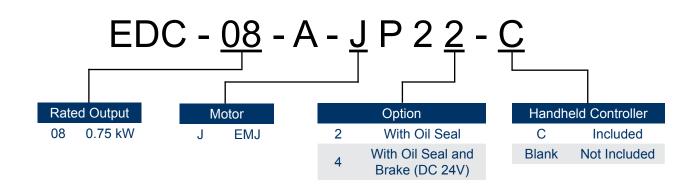

L010952


EMJ-08 Motor Specifications



- Rated Torque of 338 oz-in
- · 3-Phase, 200VAC
- Rated Power up to 750 Watts
- Peak Torque up to 300% of Rated Torque
- Peak Current up to 300% of Rated Current
- No Load Speed of up to 4,500 RPM
- 2,500 PPR Incremental Encoder Attached
- Full Enclosed and Self-Cooled
- Optional Brake Available
- Neodymium-Iron-Boron Magnets (NdFeB)
- CE Certified



| Item Number | Rated Power (Watts) | Rated Speed (RPM) | Max Speed (RPM) | Rated Torque (oz-in) | Rated Current (A rms) | Max Current (A rms) | Inertia (oz-in-sec²) | Electric Time Constant T _E (ms) | Back EMF Voltage K _E (V/kRPM) | Torque Constant K _T (oz-in/A) | Max Length L (mm) | Resistance (ohms) | Weight (lbs) |
|-------------|---------------------------|-------------------------|-----------------------|----------------------------|-----------------------------|---------------------------|-------------------------|--|--|---|----------------------------|----------------------|-----------------|
| EMJ-08APB22 | 750 | 3000 | 4500 | 338 | 4.0 | 12 | 0.0191 | 11.0 | 39 | 86.8 | 138 | 2.0 | 7.72 |
| EMJ-08APB24 | 750 | 3000 | 4500 | 338 | 4.0 | 12 | 0.0208 | 11.0 | 39 | 86.8 | 181 | 2.0 | 7.72 |

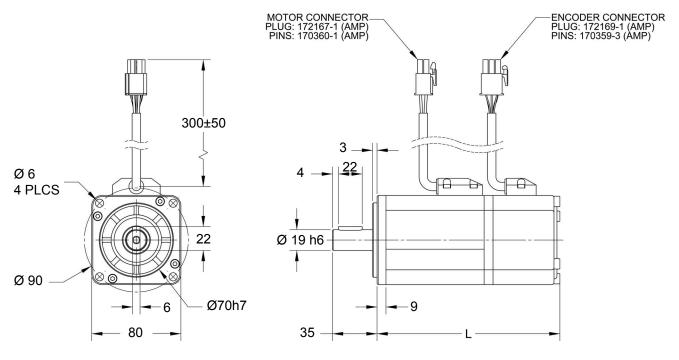

Dimensions are in mm

EDC-08 Driver Specifications




- Input Voltage Range of of 187-242 VAC
- Rated Power up to 750 Watts
- High Overload Capacity
- RS232 Communication Interface
- ESView Communication Software
- Parameter Management
- Real Time Monitoring and Adjustment
- Position and Speed Control
- Optional Handheld Controller Available
- CE Certified




EDC-08APE

54.5

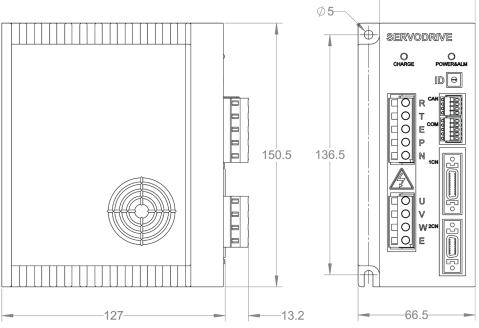


Dimensions are in mm

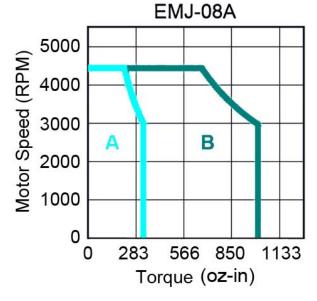

- A Continuous Working Area
- B Repeatedly Working Area



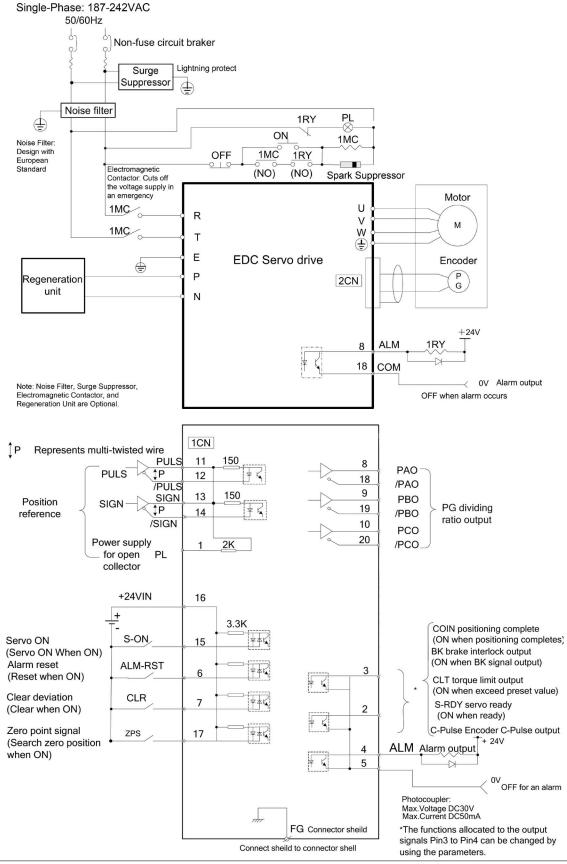



Compatible Drivers

| Part Number | Description |
|-------------|--------------|
| EDC-08APE | Servo Driver |



Compatible Motors

| Part Number | Description | | | |
|-------------|--------------|--|--|--|
| EDC-04APE | Servo Driver | | | |



Compatible Cables

| Part Number | Description |
|------------------|---------------|
| CDM-JB18-05 | Power Cable |
| CMP-JB26-05 | Encoder Cable |
| EDC-CSC-CC24A-02 | Comm. Cable |

